

18V LITHIUM ION BRUSHLESS COLLATED DRYWALL SCREWDRIVER - BARE

DCF620NT

Voltage	18V
Tool Holder	6.35 mm
Max. Torque	5 - 30 Nm
No Load Speed	0 - 4400 rpm
Max. Screw Diameter	55 mm
Weight	1.7 kg
Length x Height	380 x 233 mm



1.3MM 2450SPM METAL SHEAR - BARE

DCS491NT

Voltage	18V
No Load Stroke Rate	0-2450 spm
Cutting Capacity [Mild Steel]	1.3 mm
Cutting Capacity [Stainless Steel]	1.0 mm
Weight	1.8 kg
Length x Height	394 x 200 mm



54V LITHIUM ION BRUSHLESS 40CM CHAIN SAW

DCM575X1

Battery Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0 Ah
Bar Length	40cm
Max. Cutting Capacity	40cm
Chain Speed	15m/s
Chain Brake	< 1sec
Variable Speed	Yes
Chain Tensioning	Tool Free
Oil Capacity	115ml
Weight	5.4 kg



54V BRUSHLESS COMPRESSOR - BARE**DCC1054N**

Voltage	54 V
Tank Volume	10L
Air Delivery [at 7 BAR]	31 L/min
Max. Pressure	9.3 BAR
Regulated Pressure Rating	0 - 9.3 BAR
Quick Connect Type	Universal EU 1/4 •
Pump Type	Pump Type Oil-free
Weight	11 kg
Length x Height	360 x 420 mm

**BARE****54V BRUSHLESS BLOWER - BARE****DCM572N**

Battery Voltage	54V
Blow Speed	0-207km/h
Blow Area Volume	423 CFM
Variable Speed	Yes
Lock On Switch	Yes
Weight	3.33 kg

**BARE**

54V 30MM BRUSHLESS 3 MODE SDS-PLUS HAMMER

DCH333X2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0Ah
Max. Impact Energy	4.2 J
No Load Speed	0-1000 rpm
Blows Per Minute	0-4480 bpm
Opti Drilling Capacity [Concrete]	6-20 mm
Drilling Cap [Concrete/Wood/Metal]	30/30/13 mm
Weight	4.9 kg
Length x Height	400 x 250 mm
Vibration Level	7.5 m/s'



ALSO AVAILABLE AS:

DCH333NT

BARE

**BRUSHLESS**

54V XR FLEX VOLT




54V LITHIUM ION BRUSHLESS RECIPROCATING SAW

DCS388T2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	6.0 Ah
No Load Stroke Rate	2400 spm
Stroke Length	40 mm
Max. Depth of Cut [Wood/Pipe/PVC]	300/130/160 mm
Weight	5.6 kg
Length x Height	918 x 219 mm

**BRUSHLESS**

54V XR FLEX VOLT

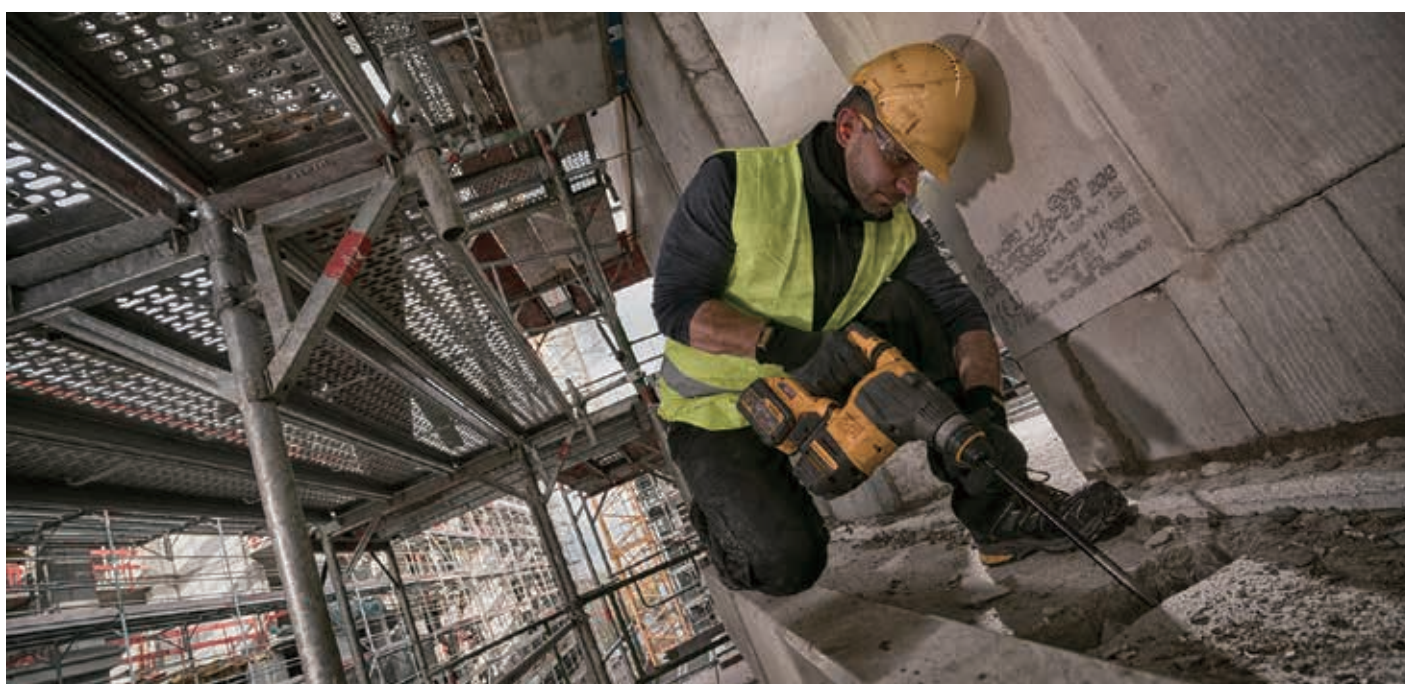

54V 67MM BRUSHLESS CIRCULAR SAW - BARE**DCS575NT**


Voltage	54V
No load speed	5800 rpm
Blade Diameter	190 mm
Blade Bore Diameter	30 mm
Bevel Capacity	57°
Max. Depth of cut at 45°/90°	49/67 mm
Weight	4.65 kg
Length x Height	355 x 245 mm

**54V LITHIUM ION BRUSHLESS DUAL HANDLE PADDLE MIXER****DCD240X2**

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0 Ah
Max. Paddle Size	160 mm
Spindle Thread	M14
Speed Settings	Yes
No Load Speed	0-225-350-475-600-725 rpm
Lock-Off Switch	Yes
Weight	6.15 kg
Length x Height	550 x 430 mm

**54V 216MM BRUSHLESS TABLE SAW****DCS7485T2**

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	6.0 Ah
No Load Speed	5800 rpm
Blade Diameter	216 mm
Blade Bore Diameter	25.4 mm
Bevel Capacity	-3 to 48°
Max. Ripping Capacity [Right/Left]	610 / 318 mm
Max. Depth of Cut at 45°/90°	45 / 65 mm
Table Size	485 x 485 mm
Weight 2	1.5 kg
Length x Height	605 x 330 mm



54V 40MM BRUSHLESS SDS-MAX® COMBINATION HAMMER

DCH481X2

Voltage	54V
Battery Chemistry	Lithium Ion
Battery Capacity	9.0 Ah
Tool Holder	SDS-Max
Max. Impact Energy	7.3 J
Impact Energy (EPTA 05/2009)	6.1 J
No Load Speed	540 rpm
Blows Per Minute	3150 bpm
Optimum Drilling Capacity [Concrete]	16-30 mm
Max. Drilling Capacity [Concrete/Core bit]	40 / 100 mm
Chipping Mode	Yes
Weight	6.65 kg
Length x Height	502 x 263 mm
Vibration Level	9.4 m/s ²



BRUSHLESS

PERFORM
PROTECT

54V XRFLEX
VOLT

54V 230MM BRUSHLESS CUT-OFF SAW - BARE

DCS690N

Voltage	54V
No Load Speed	6600 rpm
Blade Diameter	230 mm
Blade Bore Diameter	22.2 mm
Max. Depth of Cut	83 mm
Water Pipe Connection	Yes
Weight	6.25 kg
Length x Height	640 x 250 mm



BRUSHLESS

54V XRFLEX
VOLT

